




SINGLE PREMIUM TWEENER



DESIGN, PRODUCTION AND FRENCH EXPERTISE 

COMPOSITION

- 16 LED Bars of 3.8m each
- 4 LED Bars of 1.9m each
- Mounting System
- 2 Power supply boxes

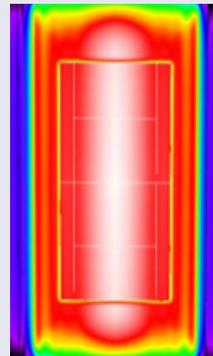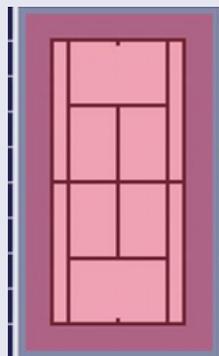

Certifications and licences



PATENT

FR n°3071586 B1
EU n° EP23219757.4
US n°11,118744 B2



LIGHTING

- Compliant with federal specifications ITF, LTA and FFT
- Playing Area > 300 lux / Uniformity > 0.7
- Color temperature : 5000°K / IRC > 70

LED BARS

- Powder - Coated Aluminium profile with ultra - resistant and anti - UV polycarbonate diffuser
- Operating temperature : -30°C to +35°C
- IP55 / IK08

MOUNTING SYSTEM

- Lacquered stainless steel
- Designed for round, square, L or T shaped posts
- Customized mounting system on non-standard post

POWER SUPPLY

- Two 1500 W drivers
- Dimensions: 850 x 250 x 100mm / Weight : 8Kg
- Input voltage : 200 - 300 VAC

COLORS

- Standard colors : Green&Black

RAL 6005 RAL 9005

- Custom colors : Upon request



OPTIONS

