NLX
Next Lighting eXperience

Tweener

PLAY BETWEEN THE LINES

SINGLE TWEENER

CLASSIC

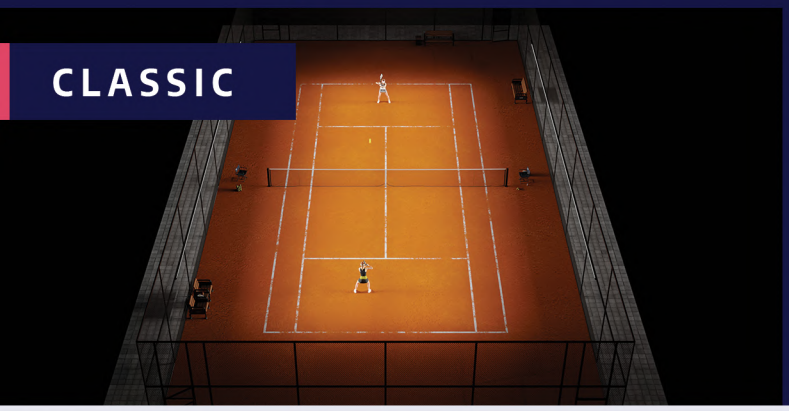

PREMIUM

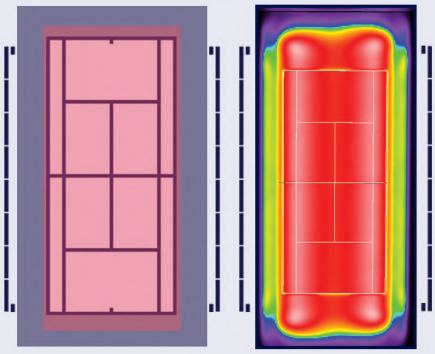

CLASSIC

COMPOSITION

- 2 x 8 long LED bars
- 2 x 2 short LED bars

- Fixing equipment
- 2 power supply boxes
- Installation guide

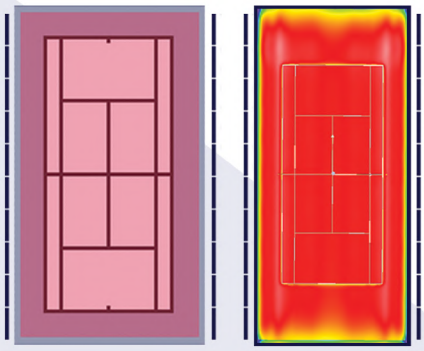

PREMIUM

The Tennis Industry Innovation Challenge

La French FAB

CE RoHS

c UL us LISTED

MADE IN FRANCE DESIGN, PRODUCTION AND EXPERTISE

LIGHTING

- 300 lux - IRC > 70 - 130 lm/w
- Electrical power: 2 200 W
- Uniformity coefficient ≥ 0.7
- Color temperature: 5000 K
- Upward Light ratio < 1%

LED BARS

- Powder-coated aluminium profile with ultra-resistant and UV-resistant polycarbonate diffuser
- Long LED bars: 380 x 5.9 x 7.9 cm - 6.3 kg
- Short LED bars: 95 x 5.9 x 7.9 cm - 2 kg
- IP (protection): 65 - IK (impact resistance): 08
- Operating temperature: -30°C to +35°C

FIXING

- Lacquered stainless steel
- Designed for round, square, L or T posts
- Customized fixing system on non-standard posts

POWER SUPPLY

- 2 power supply boxes 1200 W (IP 67) 64 x 30 x 8.8 cm - 10 kg per box
- Power supply voltage: 180 - 528 V AC

COLORS

- Standard colors: Green & Black

RAL 6005 | RAL 9005

- Custom colors : Upon request

OPTIONS

"HIGH BALL" BARS

DIMMING SYSTEM

LIGHT IMPACT CONTROL VERTICAL

LIGHT IMPACT CONTROL HORIZONTAL

NLX
Next Lighting eXperience

Tweener
PLAY BETWEEN THE LINES

DOUBLE TWEENER

COMPOSITION

- 2 x 8 long LED bars
- 2 x 2 short LED bars
- Fixing equipment
- 2 power supply boxes
- Installation guide





The Tennis Industry Innovation Challenge

La FRENCH FAB

CE RoHS

c UL us LISTED

MADE IN FRANCE DESIGN, PRODUCTION AND EXPERTISE

LIGHTING

- 300 lux - IRC > 70 - 135 lm/w
- Electrical power: 4500 W
- Uniformity coefficient ≥ 0.7
- Color temperature: 5000 K
- Upward Light ratio : < 3,50%

LED BARS

- Powder-coated aluminium profile with ultra-resistant and UV-resistant polycarbonate diffuser
- Long LED bars: 380 x 5.9 x 7.9 cm - 6.3 kg
- Short LED bars: 95 x 5.9 x 7.9 cm - 2 kg
- IP (protection): 65 - IK (impact resistance): 08
- Operating temperature: -30°C to +35°C

FIXING

- Lacquered stainless steel
- Designed for round, square, L or T posts
- Customized fixing system on non-standard posts

POWER SUPPLY

- 2 power supply boxes 2 x 1200 W (IP 67) 64 x 30 x 8.8 cm - 19 kg per box
- Power supply voltage: 180 - 528 V AC

COLORS

- Standard colors: Green & Black

RAL 6005 | RAL 9005

- Custom colors: Upon request

OPTIONS

"HIGH BALL" BARS



DIMMING SYSTEM

LIGHT IMPACT CONTROL VERTICAL

LIGHT IMPACT CONTROL HORIZONTAL